
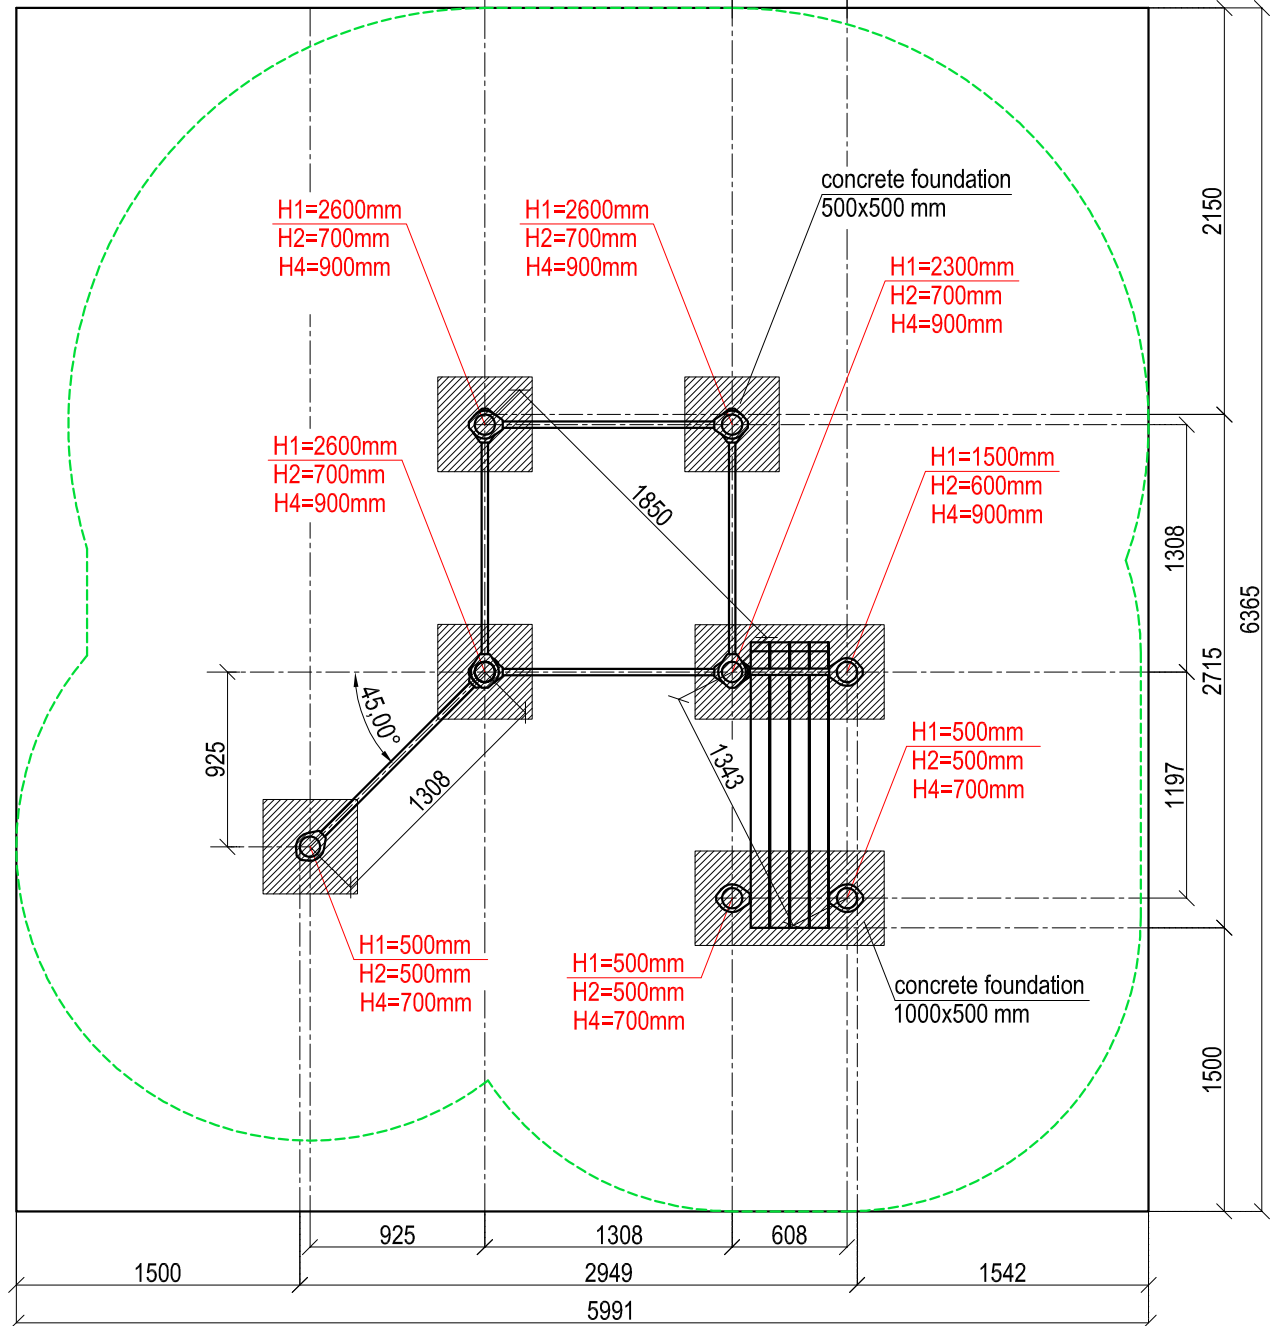
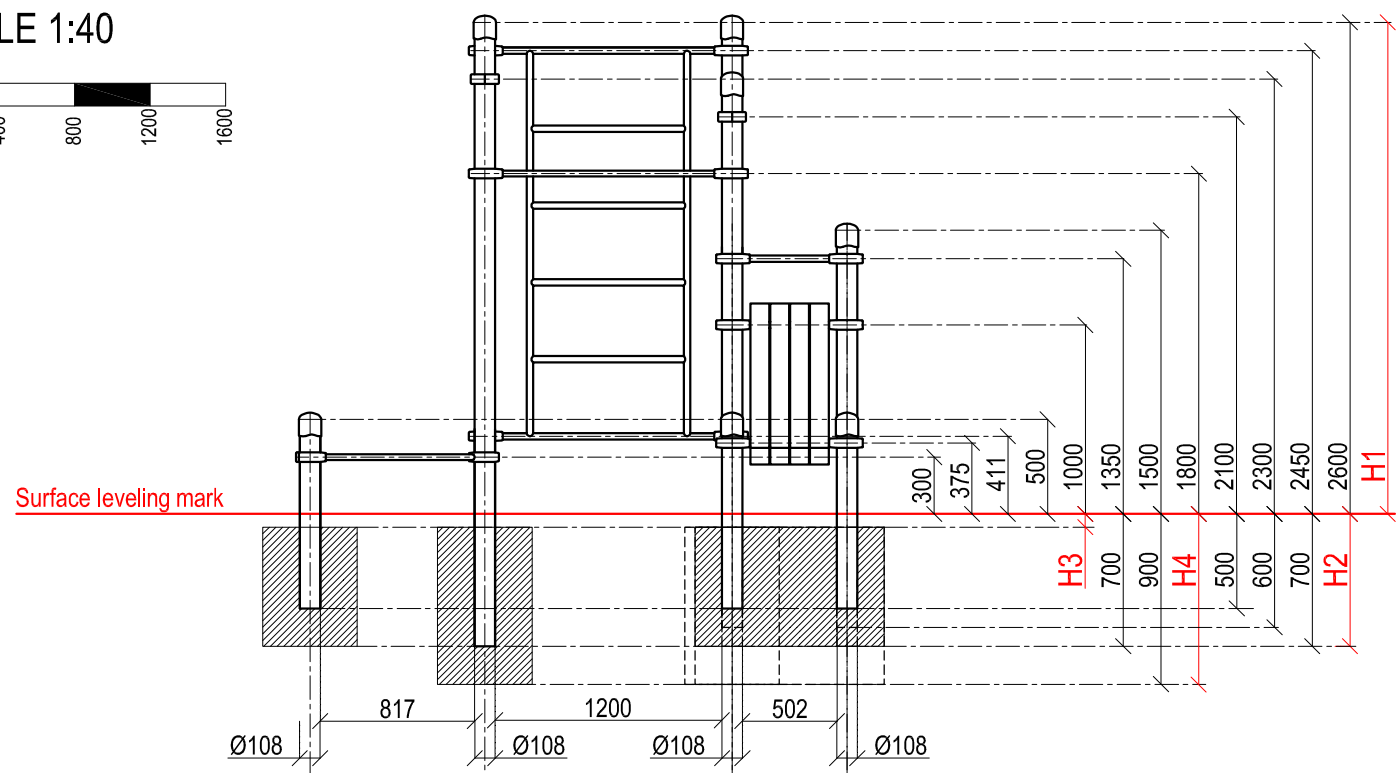


SCALE 1:40



LTD "KENGURU PRO"
 Address: Lauteres street 4, Riga, Latvia, LV-1002
 VAT Reg. No. 40103750152
 Bank: A/S DNB bank, SWIFT: RIKOLV2X,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

K-021

KENGURU New



The complex consists of eight vertical columns of different height, three crossbars 500 mm in length, four crossbars 1200 mm in length, Swedish wall and a wooden bench for abs. Optionally, two 1200 mm crossbars can be re-designed into 1758 mm. Height of the Swedish wall - 2073 mm. The distance between the crossbars of the Swedish wall - 407 mm. Construction is secured together with aluminium clamps. Weight 279.4 kg

Installation instructions:

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-021 KENGURU New				Technical information	
Foundation when using Shock absorbing underground (synthetic – rubber granulates)		Beveling of foundation when using loose filling material		width:	2715 mm
H3		H3		height:	2650 mm
40 mm	> 1.2.....1.4 m	20 cm	< 1.0 m	length:	2949 mm
50 mm	> 1.5.....1.7 m	30 cm	< 2.0 m	largest part:	3350 mm
60 mm	> 1.8.....2.0 m	40 cm	< 3.0 m	weight:	279.4 kg
70 mm	> 2.1.....2.5 m			floor space required:	5991 x 6365 mm
				pipe measurements:	diameter:
					108 mm
					33.7 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)
				metal clamps:	aluminium, powder coated, RAL 2004 (pure orange)
				bolts for metal clamps:	stainless steel, Pin Hex Button Head Security Screws M10
				wooden beam measurements:	Height, width
					92 x 100
					1650
				wooden parts:	SAYERLACK painted, NCS S3030-Y30R
				max. free fall height:	< 2450 mm
					possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
				user height:	> 140 cm
				maximum user weight:	130 kg
				certificates:	TÜV Rheinland InterCert Kft.

