
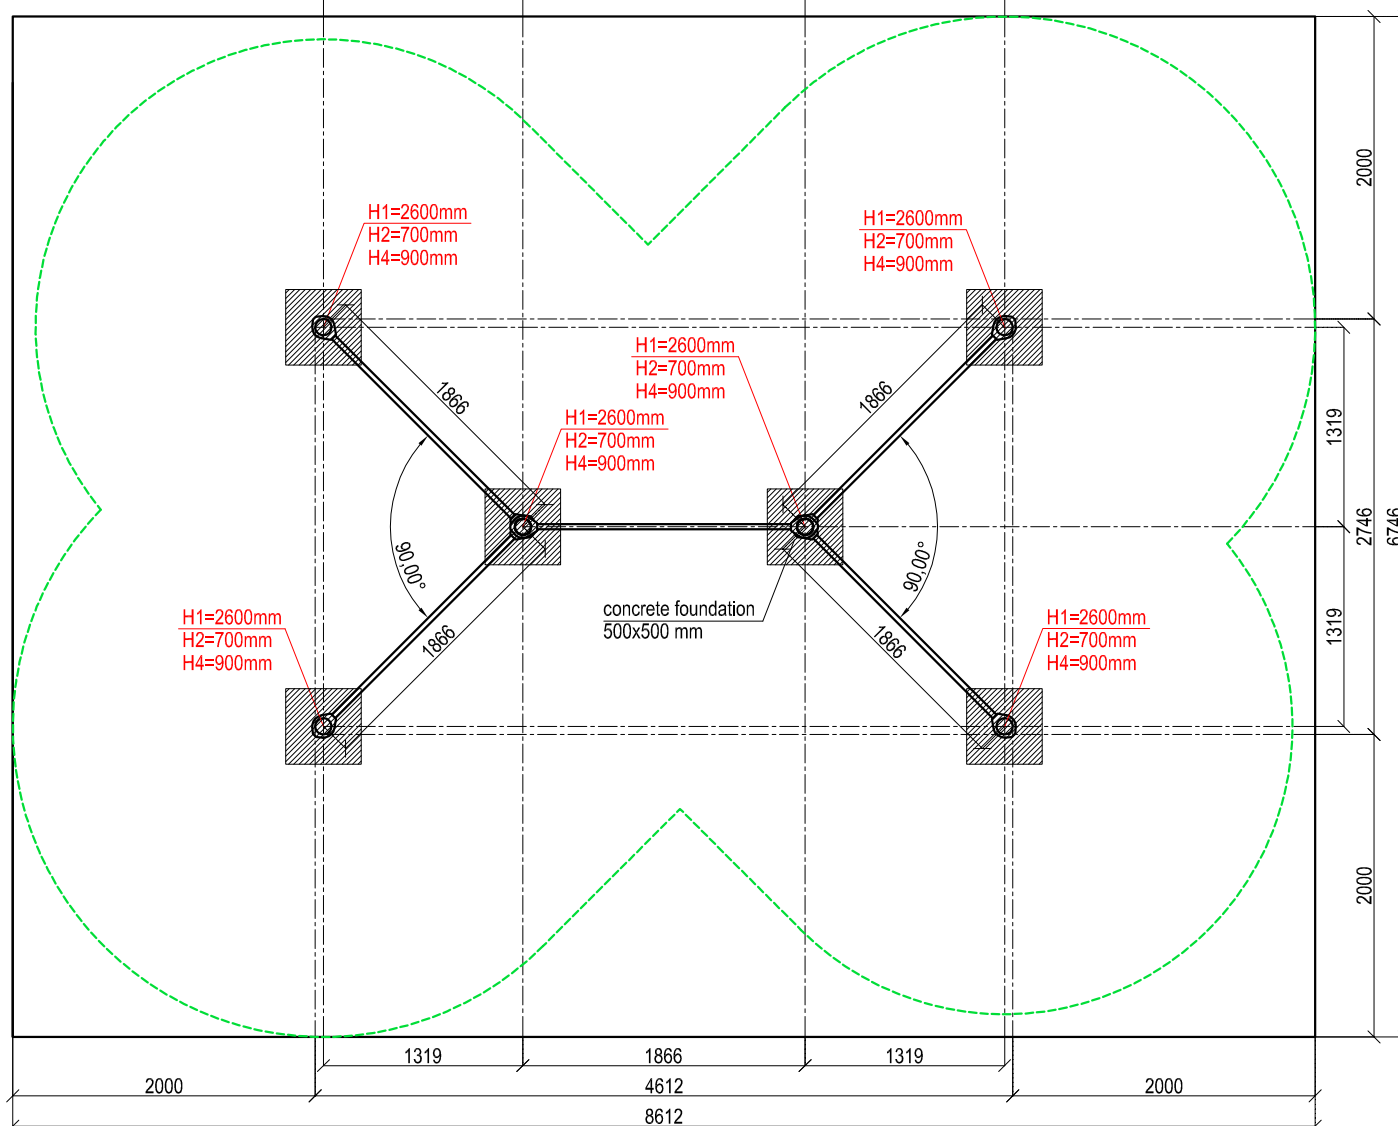
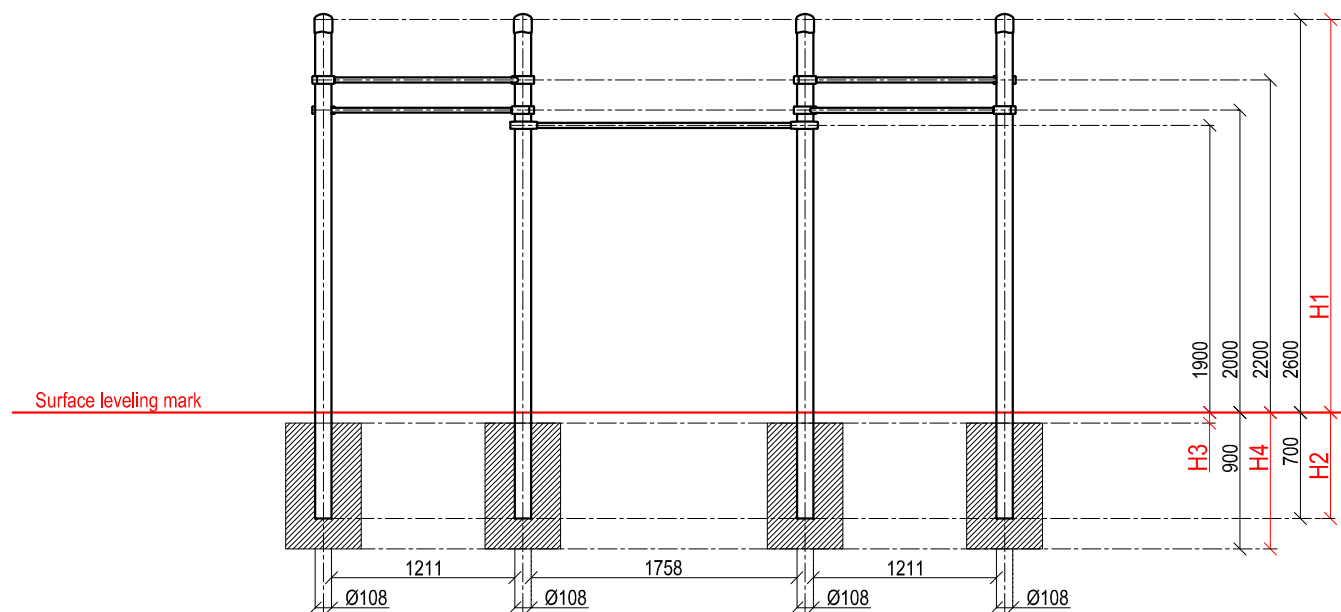



SCALE 1:50



LTD "KENGURU PRO"  
 Address: Lauteres street 4, Riga, Latvia, LV-1002  
 VAT Reg. No. 40103750152  
 Bank: A/S DNB bank, SWIFT: RIKOLV2X,  
 Bank Account: LV65RIKO0002930161161  
 e-mail: info@kengurupro.eu  
 www.kengurupro.eu

K-032

KENGURU FREESTYLE

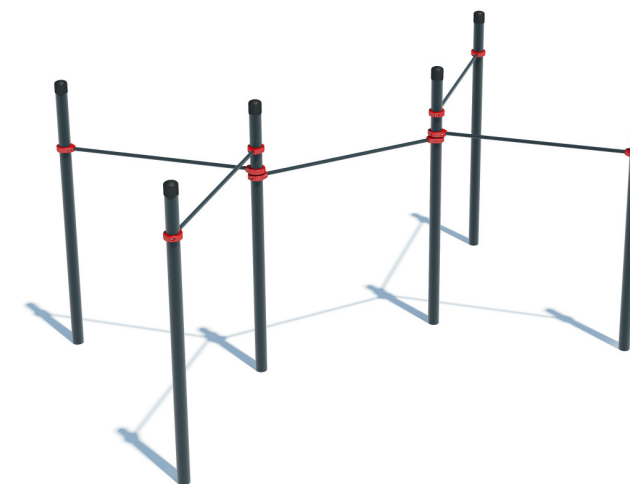

The complex consists of six vertical columns and five crossbars of 1758 mm in length. All elements of the complex are secured together with aluminium clamps at the height that corresponds to the wishes of the Client. Weight 228,5 kg

**Installation instructions:**

- Choose a suitable underground for the unit (see page 2, table 2!)
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m<sup>3</sup> concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-032 KENGURU FREESTYLE				Technical information	
Foundation when using Shock absorbing underground (syntetic – rubber granulates)		Beveling of foundation when using loose filling material		width:	2746 mm
				height:	2650 mm
				length:	4612 mm
				largest part:	3350 mm
				weight:	228.5 kg
				floor space required:	8612 x 6746 mm
				pipe measurements:	diameter: 108 mm
					wall thickness: 3.2 mm
					33.7 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)
				metal clamps:	aluminium, powder coated, RAL 2004 (pure orange)
				bolts for metal clamps:	stainless steel, Pin Hex Button Head Security Screws M10
				max. free fall height:	< 2200 mm
					possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
				user height:	> 140 cm
				maximum user weight:	130 kg
				certificates:	TÜV Rheinland InterCert Kft.

